

JS375CB-102


PHYSICAL PARAMETERS

Product model	JS375CB-102
Size(Length*Width*Thickness)	1744*1170*13.5mm(Frameless)
Weight	68kg
Glass (material/thickness)	Semi-tempered float glass 6mm
Junction box	IP68
Cable type	4mm ²
Plug connector	PV-KST4-EVO2A/xy,PV-KBT4-EVO2A/xy Staubli Electrical Connectors AG
Fire resistance class	ClassA

TEMPERATURE COEFFICIENT

Temperature coefficients of P_{max}	γ	%/°C	-0.32%/°C
Temperature coefficients of V_{oc}	β_{Voc}	%/°C	-0.25%/°C
Temperature coefficients of I_{sc}	α_{Isc}	%/°C	+0.055%/°C

PRODUCT PICTURE

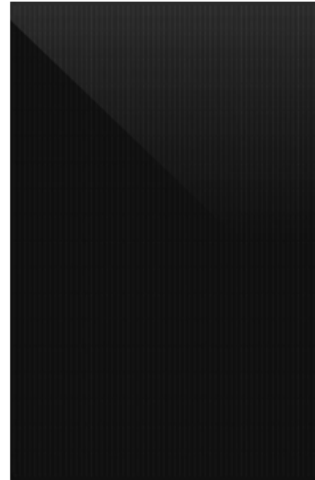


ELECTRICAL PARAMETERS(STC)

Power output (P_{max})	375W \pm 3%
Module Efficiency STC(%)	18.38%
Power tolerance	0 ~ +5W
Voltage at Pmax (V_{mpp})	63.60V
Current at Pmax (I_{mpp})	5.90A
Open circuit voltage (V_{oc})	74.60V (\pm 3%)
Short-circuit current (I_{sc})	6.20A (\pm 3%)
Maximum system voltage	DC 1500V
Maximum Over-Current Protection Rating [A]	30A

STC: 1000W/m² irradiance , 25°C cell temperature, AM1.5.
(Made in China)

DIMENSIONS

Unit : mm

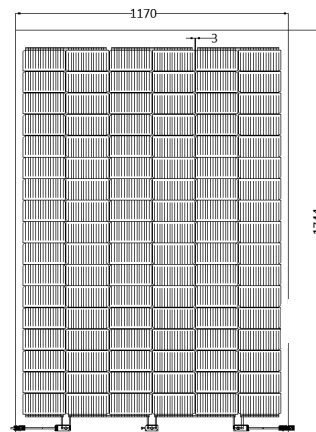

LIMITED POWER WARRANTY

1st year degradation	\leq 1%
30th year degradation	\leq 12%
Linear power warranty	30 years
Limited product warranty	15 years

Due to continuous innovation, research and product improvement, the specifications in this product information sheet are subject to change without prior notice. The specifications may deviate slightly and are not guaranteed. The data do not refer to a single module and they are not part of the offer, they only serve for comparison to different module types.



Baoding Jiasheng Photovoltaic Technology Co., Ltd.

E-mail:commerce.gs@yingligroup.com

Hotline:+86-0312-7510221

Address: Baoding Jiasheng Photovoltaic Technology Co., Ltd.

No.416,4 Floor, A Zone Building No.88 West Hengyuan Street 071000

Baoding, Hebei PEOPLE'S REPUBLIC OF CHINA

Web address: www.gainsolarbipv.com

f @ gainsolar2007

in Gain Solar

GainSolar1

QUALIFICATIONS AND CERTIFICATIONS

IEC 61215:2021 IEC 61730:2023