

JS95CB-24P

PHYSICAL PARAMETERS

Product model	JS95CB-24P
Size(Length*Width*Thickness)	1080*616.8*8mm(Frameless)
Weight	15.5kg
Glass (material/thickness)	Tempered glass 3.2mm
Junction box	IP68
Cable type	4mm ²
Plug connector	18-01 Baoding Yitong PV Science & Technology Co., Ltd.
Fire resistance class	ClassA

ELECTRICAL PARAMETERS(STC)

Power output (P _{max})	95W±3%
Module Efficiency STC(%)	14.26%
Power tolerance	0 ~ +5W
Voltage at Pmax (V _{mpp})	6.85V
Current at Pmax (I _{mpp})	13.86A
Open circuit voltage(V _{oc})	8.04V (±3%)
Short-circuit current (I _{sc})	14.79A (±3%)
Maximum system voltage	DC 1500V
Maximum Over-Current Protection Rating [A]	30A

STC: 1000W/m² irradiance , 25°C cell temperature, AM1.5.

(Made in China)


TEMPERATURE COEFFICIENT

Temperature coefficients of P _{max}	γ	%/°C	-0.32%/°C
Temperature coefficients of V _{oc}	β_{Voc}	%/°C	-0.25%/°C
Temperature coefficients of I _{sc}	α_{Isc}	%/°C	+0.055%/°C

LIMITED POWER WARRANTY


1st year degradation	≤1%
30th year degradation	≤12%
Linear power warranty	30 years
Limited product warranty	15 years

PRODUCT PICTURE

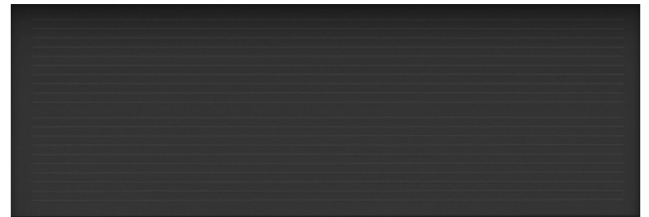

DIMENSIONS

Unit : mm

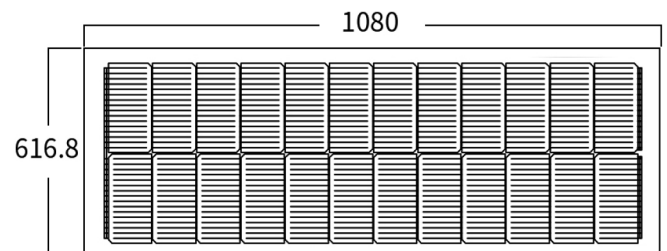

Baoding Jiasheng Photovoltaic Technology Co., Ltd.

E-mail : commerce.gs@yingligroup.com

Hotline : +86-0312-7510221

Address: Baoding Jiasheng Photovoltaic Technology Co., Ltd.

No.416, 4 Floor, A Zone Building No.88 West Hengyuan Street 071000

Baoding, Hebei PEOPLE'S REPUBLIC OF CHINA

Web address: www.gainsolarbipv.com

gainsolar2007

Gain Solar

Gainsolar1

QUALIFICATIONS AND CERTIFICATIONS

IEC 61215:2021 IEC 61730:2023