## JS80CB-24

PHYSICAL PARAMETERS	
Product model	JS80CB-24
Size(Length*Width*Thickness)	1080*616.8*8mm(Frameless)
Weight	15.5kg
Glass (material/thickness)	Tempered glass 3.2mm
Junction box	IP68
Cable type	4mm²
Plug connector	18-01 Baoding Yitong PV Science & Technology Co., Ltd.
Fire resistance class	ClassA

80W±3%	
12.01%	
0 ~+5W	
13.79V	
5.80A	
16.21V (±3%)	
6.20 A (±3%)	
DC 1500V	
30A	
	12.01% 0 ~+5W 13.79V 5.80A 16.21V(±3%) 6.20 A (±3%) DC 1500V

TEMPERATURE COEFFICIENT				
Temperature coefficients of P <sub>max</sub>	γ	%/°C	-0.32%/°C	
Temperature coefficients of V <sub>oc</sub>	$\beta_{\text{Voc}}$	%/°C	-0.25%/°C	
Temperature coefficients of Isc	$\boldsymbol{\alpha}_{lsc}$	%/°C	+0.055%/°C	


LIMITED POWER WARRANTY		
1st year degradation	≤1%	
30th year degradation	≤12%	
Linear power warranty	30 years	
Limited product warranty	15 years	

## PRODUCT PICTURE



## **DIMENSIONS**

Unit:mm

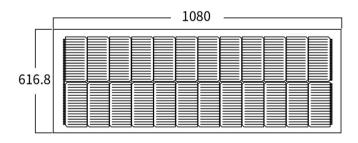

Due to continuous innovation, research and product improvement, the specifications in this product information sheet are subject to change without prior notice. The specifications may deviate slightly and are not guaranteed. The data do not refer to a single module and they are not part of the offer, they only serve for comparison to different module types.



## Baoding Jiasheng Photovoltaic Technology Co., Ltd.

E-mail:commerce.gs@yingligroup.com

Hotline:+86-0312-7510221

Address: Baoding Jiasheng Photovoltaic Technology Co., Ltd. No.416, 4 Floor, A Zone Building No.88 West Hengyuan Street071000

Baoding, Hebei PEOPLE'S REPUBLIC OF CHINA

Web address: www.gainsolarbipv.com



gainsolar2007



Gain Solar

